

Highlights:

- Stores up to 27 units of 19" Equipment
- Standard keylock for both doors
- Integrated ventilation grid on top
- 50 mm Wheels + leveling feet included
- Removable sides for easy installing & cabling
- Punched square holes for use with snap-in cage nuts
- Front and rear in depth adjustable 19" profiles (max 540 mm)
- Tempered glass door with keylock
- Reversible door position

Product information:

The SPR627 is a professional 19" rack compliant to the ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. A cold rolled steel 2 mm thick frame and 1,2 mm thick plates provides a solid and stable construction making it suitable for heavy equipment, storing up to 27 units inside. The SPR627 comes fully assembled including 50 mm wheels for easy moving and adjustable feet for fixing and leveling once correctly positioned. The 19" mounting profile with punched square holes for use with snap-in cage nuts in combination with the printed unit measurement indicators ensure an easy fitting of the equipment. Adjustable 19 " profiles provide great flexibility for installing equipment depending on its depth. Both front and rear doors are fitted with a standard keylock.





Product Features:

Unit height		27 HE
Weight		141.096 lb
Colours		Black (RAL9004)
Accessories	Optional	KS600 - M6 x 16 mm bolt DIN7985 Black
		KM600 - M6 Cage nuts
		SPR60LR - L-rail (horizontal support)
	Included	4 x Key for sidepanel lock
		1 x Allen key
		4 x Levelling feet
		4 x Key for front/back door
	Optional	SPR10CS - Rack interconnection slot
		SPR60FS - Fixed shelf
		SPR60SS - Sliding shelf
		SPR60PT - Rack plinth
		SPR60RF - Cooling roof fan unit (230V)
Max. usable depth		21.26 "
Wheel	Diameter	1.97 "
Dimensions		23.62 x 51.89 (54.65) x 23.62 " (W x H (incl. feet) x D)
Accessories	Included	20 x KS600
		20 x KM600
Static load capacity (adjustable feet)		1763.70 lb
Dynamic load capacity (transport castors)		881.85 lb

Architects' and Engineers' Specifications:

The rack shall have the following dimensions: Height 1318 mm, Depth 600 mm, Width 600 mm, have a Weight of 57 kg and hold up to 27 units. The rack shall comply with ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. 50 mm wheels will be included as well as leveling feet. The frame of the rack shall be constructed out of cold rolled steel of 2 mm thick while for the other parts a thickness of 1.2 mm shall be used. These parts shall have a textured black powder coating (RAL9004) color. The mounting rail shall be adjustable in depth on the front and rear side and have unit measurement indicators on the front. Rack shall include tempered smokey grey glass door on the front side and a steel door on the rear side, both equipped with standard key-lock. Sides of the rack shall be removable and the top shall have a ventilation grid.

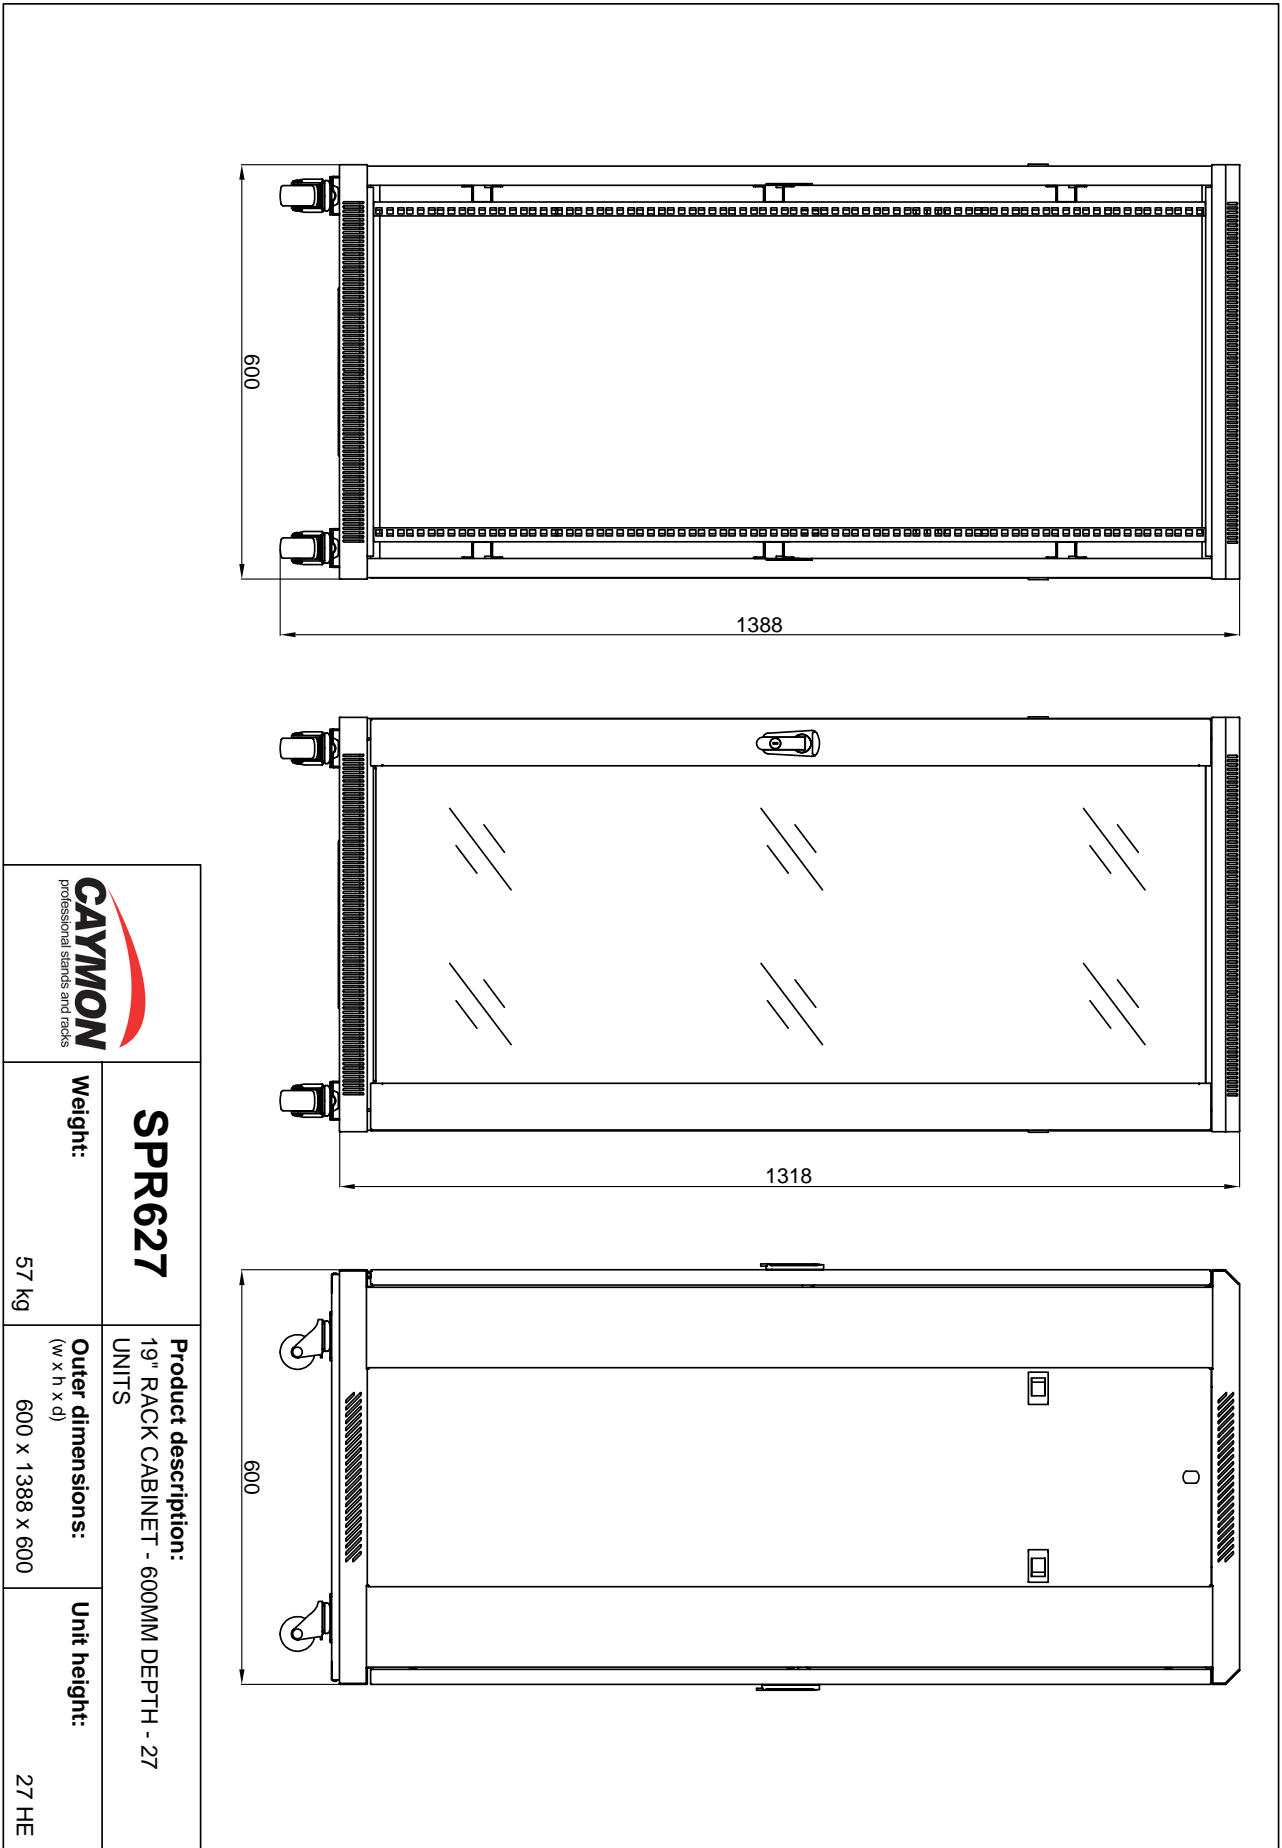

 <small>professional stands and racks</small>		SPR627	Product description: 19" RACK CABINET - 600MM DEPTH - 27 UNITS
Weight: 57 kg	Outer dimensions: <small>(w x h x d)</small> 600 x 1388 x 600		