

### Highlights:

---

- Stores up to 12 units of 19" Equipment
- Integrated ventilation grid on top
- Cable entry on top, back & bottom (closable)
- Removable sides for easy installing & cabling
- Removable rear panel
- Punched square holes for use with snap-in cage nuts
- Front in depth adjustable 19" profiles (max 410 mm)
- Loading capacity of 132.28 lb
- Tempered glass door with keylock
- null

### Product information:

---

The WPR412R is a professional 19" wall mount metal rack compliant to ANSI/EIA RS-310D, DIN41491, IEC 60297 standards. It is a solid construction with a cold rolled steel 1,5 mm thick frame and 1,2 mm thick plates. The WPR412R comes fully assembled and can easily be mounted on the wall. The 19" mounting profile with punched square holes for use with snap-in cage nuts in combination with the printed unit measurement indicators ensure easy fitting of the equipment. The tempered smokey grey glass door is fitted with a keylock to keep the equipment only accessible for authorized persons. The removable sides and back panel allow easy installing and cabling of the equipment while the in depth adjustable 19" profiles provide great flexibility for installing equipment depending on its depth.



## Product Features:

---

Dimensions		23.62 x 25.12 x 17.72 " (W x H x D)
Unit height		12 HE
Weight		52.029 lb
Max. load		132.28 lb
Max. usable depth		16.14 "
Colours		Black (RAL9004)
Accessories	Included	10 x Cage nuts + screws
		2 x key for front door
		1 x WPR45LR
		4 x Key for sidepanel lock
		1 x Allen key
	Optional	KM600 - M6 Cage nuts
		KS600 - M6 x 16 mm bolt DIN7985 Black
		WPR45FS - Fixed shelf
		WPR45LR - L-Rail pair
		WPR10RF - Roof fan 120x120 mm
		SPR10DC - Dust cover brush
		null

## Variants:


---


- WPR412R/B - Black version

## Architects' and Engineers' Specifications:

---

The rack shall have the following dimensions: height 638 mm, depth 450 mm, width 600 mm, have a weight of 23.6 kg and hold up to 12 units. The rack shall comply with ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. The wall panel shall be separable from the rack which allows preloading of the rack and mounting of the panel without the rack attached. The frame of the rack shall be constructed out of cold-rolled steel of 1,5 mm thick while for the other parts a thickness of 1,2 mm shall be used. These parts shall have a textured black powder coating (RAL9004) color. The mounting rail shall be adjustable in depth and have printed unit measurement indicators. Rack shall include tempered smokey grey glass door on the front equipped with standard key-lock. Sides and back of the rack shall be removable and the top shall have a ventilation grid.

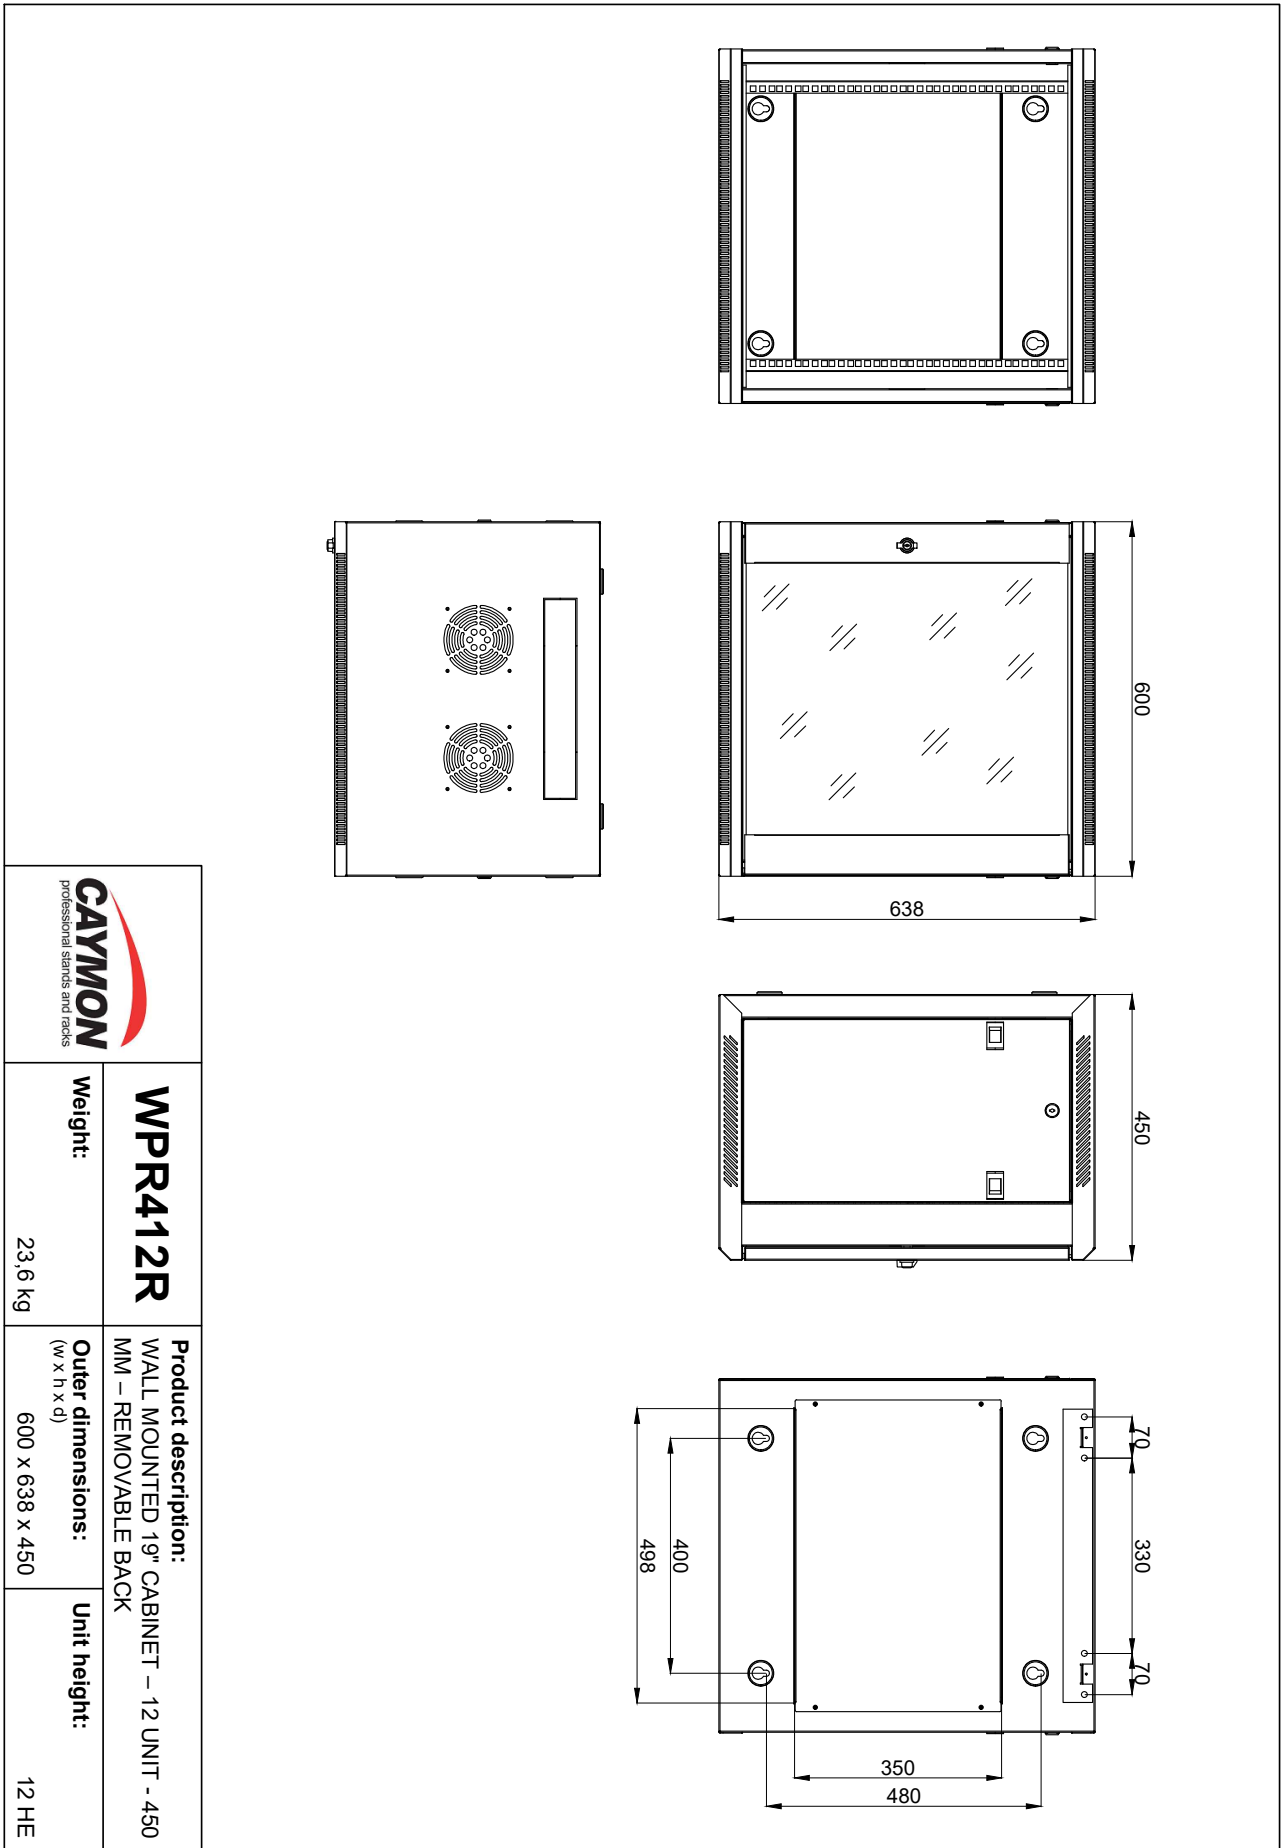

	<b>WPR412R</b>	<b>Product description:</b> WALL MOUNTED 19" CABINET - 12 UNIT - 450 MM - REMOVABLE BACK
	<b>Weight:</b> 23,6 kg	<b>Outer dimensions:</b> (w x h x d) 600 x 638 x 450