### **ARENACOB4HALO**

IP multifunctional Tungsten+ ambershift LED blinder





ARENACOB4HALO is a proper LED replacement for a traditional 4 cell DWE blinder. Each of the individually controllable 84W LED "Halo" cells delivers a powerful Tungsten-like punch that has been designed to read in even the largest environments.

#### **FEATURES**

- Four powerful LED "Halo" Cells with color temperature shift on dimming for true tungsten emulation.
- Individual cell control for effects, with sizing and spacing matching traditional linear blinders.
- IP65 housing for the most demanding environments with virtually limitless "building block" rigging system.



#### LIGHT SOURCE

White COB 4x72W + Amber 16x3W



#### **CONTROL**


Pixel2Pixel Control




#### **IP RATE**

IP 65 for outdoor events

#### **PHOTO GALLERY & APPLICATIONS**

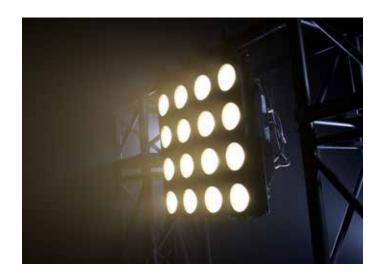

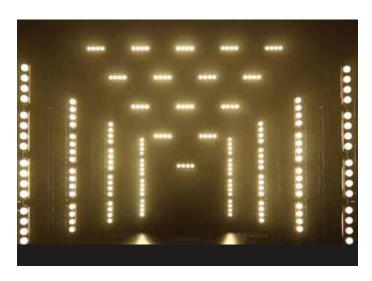

## **ARENACOB4HALO**

IP multifunctional Tungsten+ ambershift LED blinder




#### ARENACOB4HALO Technical Specification


LIGHT SOURCE	
Source:	3000K White COB 4x72W + Amber 16x3W
CT:	3000K
CRI:	>92Ra
Luminous Flux:	14386lm
Lux:	(24°) 6330lux@3m
OPTICS	
Beam Angle:	(inc) 24° - (opt) 40°
Field Angle:	42°
Pixel pitch:	150mm / 5.91"
Additional Optics:	40°(opt), 32° without magnetic lens
Other:	Magnetic replacement of front lens
COLOR SYSTEM	
Color Mixing:	Tungsten 3000+ambershift
CTC:	Amber-shift activation by DMX
DYNAMIC EFFECTS	
Pixel Patterns:	Preprogrammed dynamic and static patterns
FX Generator:	Adjustable foreground/ background color, index, speed, direction

CONTROL	
Protocols:	DMX512, RDM
Pixel Control:	Pixel2Pixel control
ELECTRONICS	
Dimmer:	Linear 0~100% electronic dimmer
Dimmer Curves:	4Different dimming curves available
Strobe/Shutter:	1-28Hz, electronic
ELECTRICAL	
Power Consumption (at 230V):	341W
Power Consumption (at 120V):	350W
PHYSICAL	
Signal Connection:	5p IP in/out
Power Connection:	Seetronic Powerkon True IP65 in/out
IP:	65for outdoor events
Dimensions (WxHxD):	619x167x264mm / 24.37"x6.57"x10.39"
Weight:	7,9kg / 17.42lbs

#### **TECHNICAL DRAWING**



# 20°-42° With Lens Om 1m 47238 lx 5249 lx 10m 10m 10m 4723 k 4724 lx









info@prolightsamerica.com www.prolightsamerica.com

Distributed by



A.C. Lighting Inc. Tel: +1 416-255-9494 Fax: +1 416-255-3514

northamerica@aclighting.com www.aclighting.com

PHOTOMETRIC DATA